


For CODIFICATION , see data sheet **F.T R 0011**

N : Nitrile
V : Viton
S : Saphir

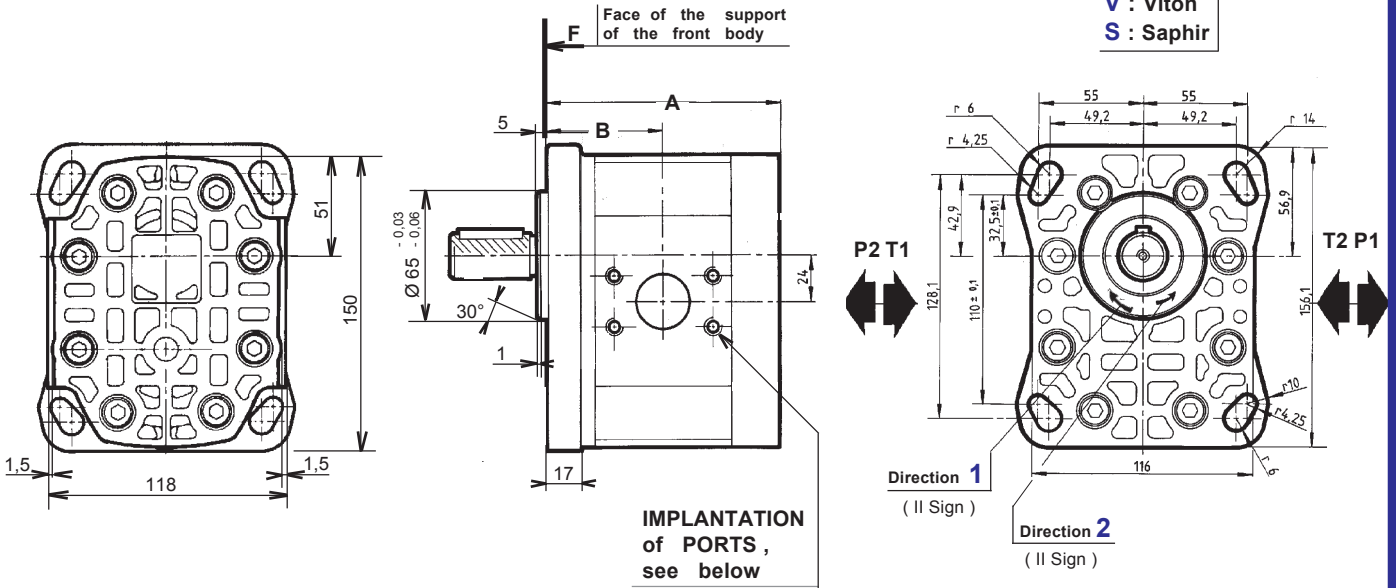

CHOICE of the CAPACITY (VI Sign)	Dimensions	
	A	B
020 025 031 040	122,7	61,3
050 060	149,2	74,5

CHOICE of the DRIVING SHAFTS	
20 (IX - X Sign) C04 (XI Sign)	40 (IX - X Sign) C04 (XI Sign)

Max. transmissible torque
32 m.daN

Max. transmissible torque
28 m.daN

Multiple geared pumps , see data sheet **F.T 30 619**
Rear bodies , see data sheet **F.T R 0192**

IMPLANTATION of PORTS (VII Sign)	Capacity (VI Sign)	INLET (T)					OUTLET (T)					CATALOGUE N° 70 Ref. RECOMMENDED FLANGES (for speed 1500 rev / min)	
		ØC	D	E	ØF	G	ØC	D	E	ØF	G	INLET (T)	OUTLET (P)
		Y (ISO 6162) Ø F effective depth G	020 to 040	28	52,4	26,2	M10	17	18	52,4	26,2	M10	17
	050 - 060						34	52,4	26,2	M10	17		
	050 - 060	42	69,8	35,6	M14	17							

F.T 30 422

HYDRAULIC GEAR PUMPS SERIES **3** TYPE **CBN**

Dimension readings and approximative characteristics subject to modifications